



EFFECTIVE 07-01-2002

ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
PROJECT NO.			
COUNTY			DATE

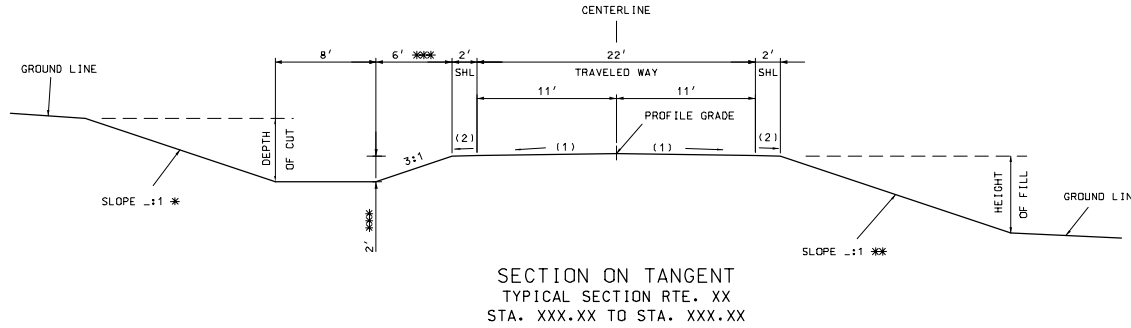

- CROSS SLOPE
- (1) 2.0%
  - (2) 4.0%
  - (3) S.E. SLOPE IF GREATER THAN 4.0%.

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

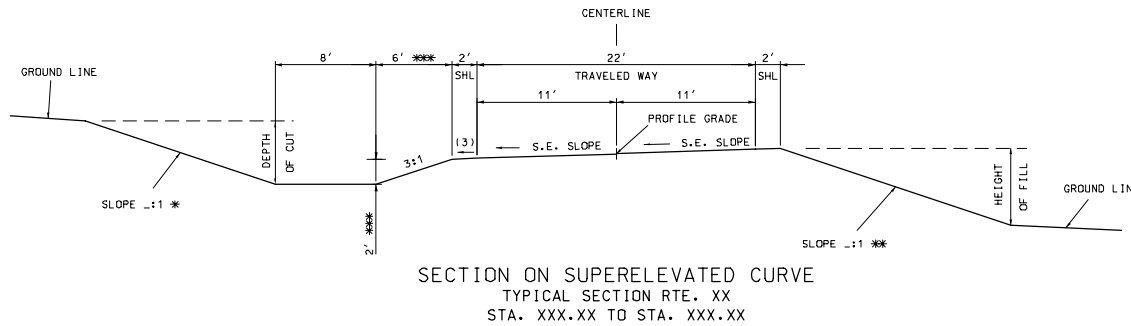

- \* BACKSLOPE DETERMINED BY SOIL SURVEY.
- \*\* THE FILL SLOPE SHALL BE 3:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 6 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- \*\*\* 4' DITCH DEPTH PREFERRED IF ALTERNATE 2' ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 12' FOR 4' DITCH DEPTH.

D-66E	
FUNCTION	COLLECTOR & LOCAL
ADT	< 400
TRAVELED WAY WIDTH	22'
ROADBED WIDTH	26'
FORE SLOPE	3:1
DITCH	2'

EFFECTIVE 07-01-2002

ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
PROJECT NO.			
COUNTY			DATE

CROSS SLOPE

- (1) 2.0%
- (2) 4.0%
- (3) S.E. SLOPE IF GREATER THAN 4.0%.

SEE STANDARDS M203.20, M606.00 AND M609.40 FOR SHOULDER WIDENING.

- \* BACKSLOPE DETERMINED BY SOIL SURVEY.
- \*\* THE FILL SLOPE SHALL BE 1:3 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 0.6 METERS (I.E. THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 1.8 METERS). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 0.6 METERS, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- \*\*\* 1.2 m DITCH DEPTH PREFERRED IF ALTERNATE 0.6 m ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 3.6 m FOR 1.2 m DITCH DEPTH.

SLOPE CONVENTION IS METRIC (V:H).

M-D-66E	
FUNCTION	COLLECTOR & LOCAL
ADT	< 400
TRAVELED WAY WIDTH	6.6 m
ROADBED WIDTH	7.8 m
FORESLOPE	1:3
DITCH	0.6 m

