

1 (1)
GO20-1
ROAD WORK NEXT XX MILES

2 (1) (3)
WO20-1
ROAD WORK AHEAD
BRIDGE OR RAMP

3 (1) (4)
WO3-5
SPEED LIMIT XX

4 (1)
R2-1
SPEED LIMIT XX

5 (1)
WO20-5
CENTER LANE CLOSED AHEAD
LEFT OR RIGHT

5A (1)
WO20-5a
2 (RIGHT) LANES CLOSED AHEAD
CENTER OR LEFT

6 (1)
WO20-6a
RIGHT LANE CLOSED

7 (1)
WO20-4
ONE LANE ROAD AHEAD

8 (1) (2)
WO20-7a
WORKER AHEAD

9
WO8-6c
TRUCK ENTRANCE

10 (1) (2)
WO8-6
TRUCK CROSSING

11 (1)
WO3-4
BE PREPARED TO STOP

12 (1)
WO3-3
TRAFFIC LIGHT

13
R1-2
YIELD

14 (1) (5)
WO1-3L (LEFT)
WO1-3R (RIGHT)

15 (1) (6)
WO1-4L (LEFT)
WO1-4R (RIGHT)

16
WO1-6
LEFT ARROW

16A (7)
WO1-8 (SMALL)
OR WO1-8a (LARGE)
RIGHT ARROW

NOTES:

(1) FLAGS SHALL ENHANCE ALL SIGNS WITHIN THE FIRST ADVANCED WARNING AREA.

(2) FLAGS SHALL ENHANCE THE SIGN.

(3) ADVANCE WARNING RAIL SYSTEM SHALL ENHANCE THE FIRST OCCURRENCE OF SIGN IN THE WORK ZONE, ACCORDING TO EPG 616.2.9.

(4) USE ONLY WHEN SPEED REDUCTION IS GREATER THAN 10 MPH BELOW NORMAL POSTED SPEED LIMIT. FURTHER GUIDANCE IN EPG 616.29 WORK ZONE SPEED LIMITS.

(5) USE WHEN DESIGN SPEED IS 30 MPH OR LESS. CONSIDER USING SIGN (44).

(6) USE WHEN DESIGN SPEED LIMIT IS GREATER THAN 30 MPH. CONSIDER USING SIGN (44).

(7) USE WO1-8a CHEVRON ON DIVIDED HIGHWAYS.

FOR DETAILS AND DIMENSIONS, SEE STANDARD PLAN 616.10.



17
MO4-10R (RIGHT)
MO4-10L (LEFT)



18
WO20-2



20 (1)
WO20-3



21
WO21-5b



22
WO8-9




WO8-17
SHOULDER
DROP-OFF
WO8-17P
23


XX MILES



WO12-2
LOW
CLEARANCE
24
WO12-2x




25
(NORMAL SPEED)
R2-1



26
GO20-2



27
MO4-9R (RIGHT)
MO4-9L (LEFT)



(8)
WO12-2
LOW
CLEARANCE
28
WO12-2x



29
R11-2



(8) (8)
30
WO12-2a



31
WO6-3



32
WO1-4bR (RIGHT)
WO1-4bL (LEFT)



33
WO1-4cR (RIGHT)
WO1-4cL (LEFT)

NOTES:

(8) TYPE B WARNING LIGHTS

FOR DETAILS AND DIMENSIONS, SEE
STANDARD PLAN 616.10.



34

WO5-5



35

WO8-12



36

WO8-11




37 (6)

WO1-2L (LEFT)
WO1-2R (RIGHT)



38

WO1-1L (LEFT)
WO1-1R (RIGHT)



39

WO3-1



40

WO3-2



41

R1-1



OR



41A (9)

R1-3



42

R4-7a

BRIDGE
OR
RAMP



43

WO5-1



44 (10) (11)

WO13-1



44A (10)

WO7-3a



46

R4-1



46A

R4-2



47

R10-6

LOW CLEARANCE

OR



48

SPECIAL

NOTES:

(9) ONLY FOR USE WITH STOP SIGN WHEN CONDITION EXISTS. FOR ONE-WAY OR TWO-WAY STOP, A PLATE IS NOT USED.

(10) ONLY USED IN COMBINATION WITH WARNING SIGN.

(11) SHOULD BE USED WHEN THE DESIGN SPEED IS LESS THAN THE POSTED WORK ZONE SPEED.

FOR DETAILS AND DIMENSIONS, SEE STANDARD PLAN 616.10.



49
EO5-1




52
MO4-8a




CONST - 3A 53 (1)



54
GO20-5aP




CONST - 3X 53A



TEMPORARY RAISED PAVEMENT MARKERS



TUBULAR MARKERS

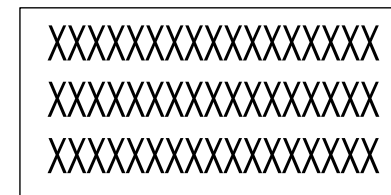

CHANGEABLE MESSAGE SIGN (CMS)




TYPE III MOVABLE BARRICADE





CHANNELIZERS (12)



DIRECTIONAL INDICATOR BARRICADES



FLAGGER



FLASHING ARROW PANEL(S)



TYPE F TEMPORARY CONCRETE TRAFFIC BARRIER



END TREATMENT

NOTES:
(12) CONES ALLOWABLE FOR DAYLIGHT OPERATIONS ON MINOR ROADS ONLY.

FOR DETAILS AND DIMENSIONS, SEE STANDARD PLAN 616.10.

SIGNS AND DEVICES LEGEND
FIGURE 616