



ROUTE	STATE	DISTRICT	SHEET NO.
	MO		
JOB NO.			
CONTRACT ID.			
PROJECT NO.			
COUNTY			DATE

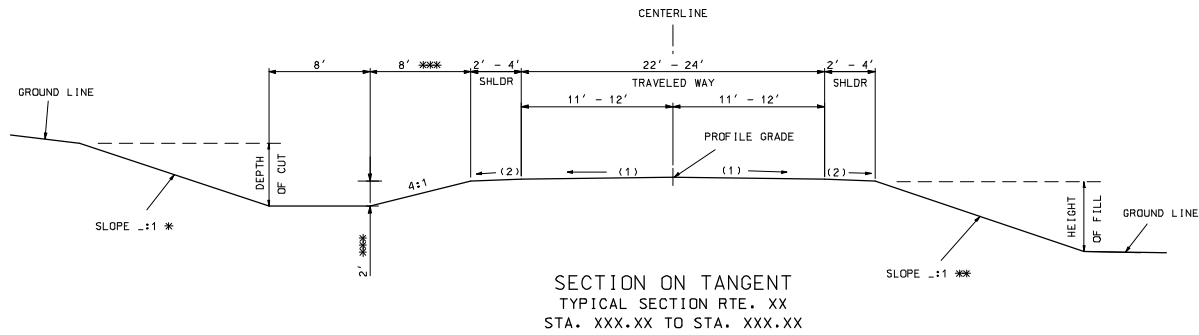

CROSS SLOPE
 (1) 2.0%
 (2) 4.0%
 (3) S.E. SLOPE IF GREATER THAN 4.0%

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

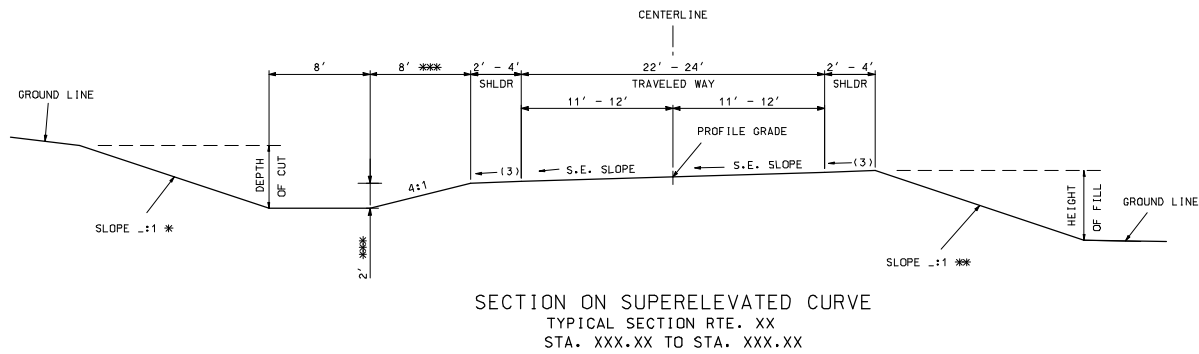

SECTION ON SUPERELEVATED CURVE
 TYPICAL SECTION RTE. XX
 STA. XXX.XX TO STA. XXX.XX

- * BACKSLOPE DETERMINED BY SOIL SURVEY.
- ** THE FILL SLOPE SHALL BE 4:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 8 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- *** 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 16' FOR 4' DITCH DEPTH.

	D-67F
FUNCTION	LOCAL ROADWAY
ADT	>400
TRAVELED WAY WIDTH	22' - 24'
ROADBED WIDTH	26' - 32'
FORESLOPE	4:1
DITCH	2'