

"THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT."

DATE PREPARED  
09/29/2008

ROUTE STATE  
DISTRICT SHEET NO.  
MO

COUNTY

JOB NO.

CONTRACT ID.

PROJECT NO.

BRIDGE NO.


DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


105 WEST CAPITOL  
JEFFERSON CITY, MO 65102  
1-888-ASK-MODOT (1-888-275-6636)

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

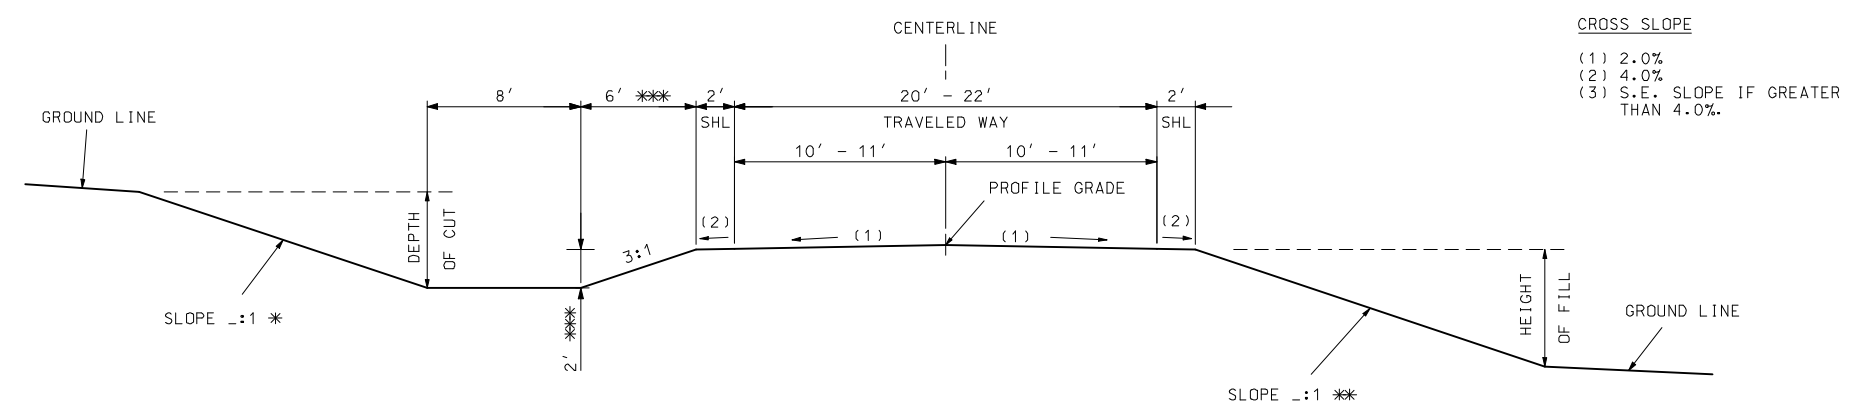

SECTION ON TANGENT  
TYPICAL SECTION RTE. XX  
STA. XXX.XX TO STA. XXX.XX

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

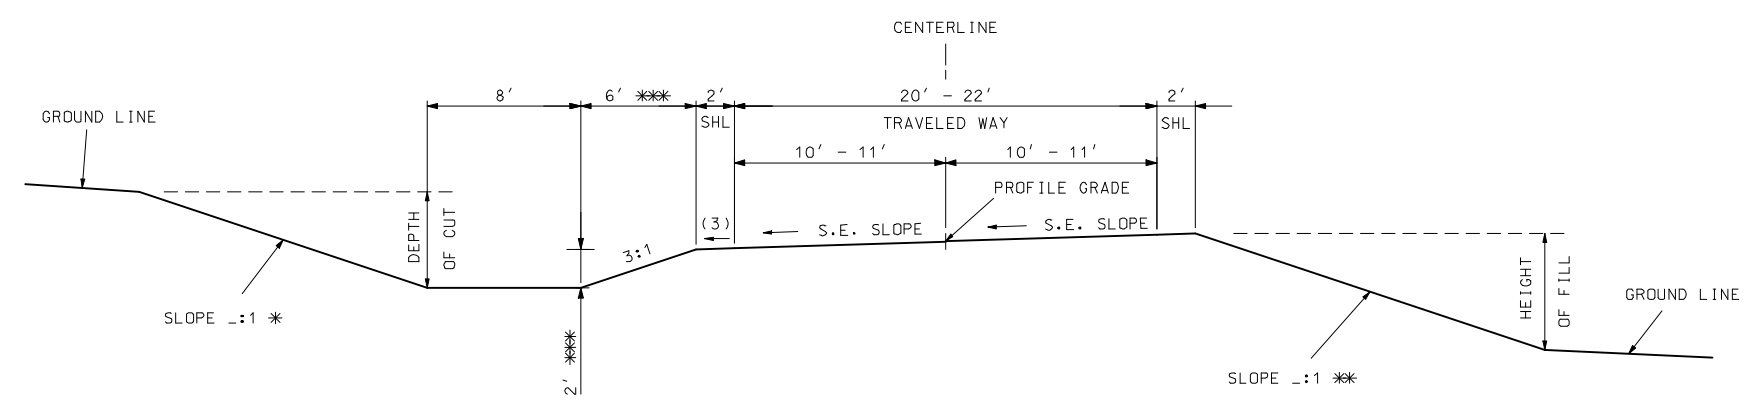

SECTION ON SUPERELEVATED CURVE  
TYPICAL SECTION RTE. XX  
STA. XXX.XX TO STA. XXX.XX

- \* BACKSLOPE DETERMINED BY SOIL SURVEY.
- \*\* THE FILL SLOPE SHALL BE 3:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 6 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- \*\*\* 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 12' FOR 4' DITCH DEPTH.

	D-66F
FUNCTION	LOW VOLUME LOCAL ROADWAYS
ADT	< 400
TRAVELED WAY WIDTH	20' - 22'
ROADBED WIDTH	24' - 26'
FORESLOPE	3:1
DITCH	2'