
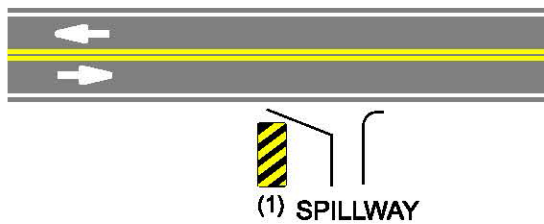
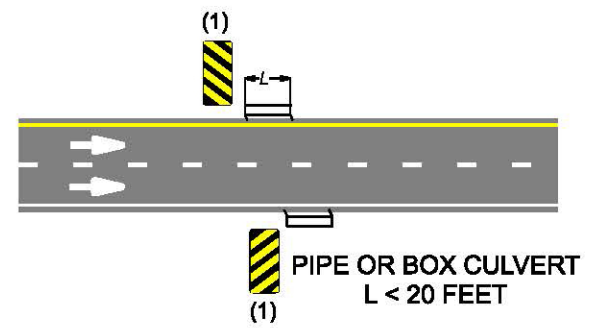
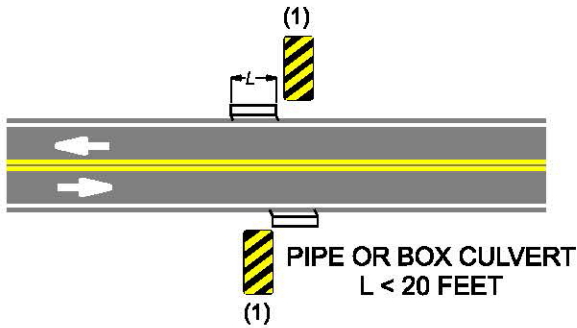
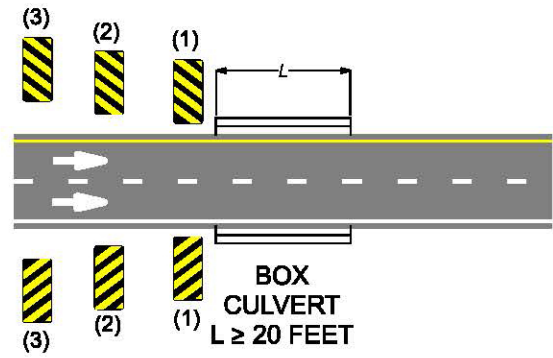
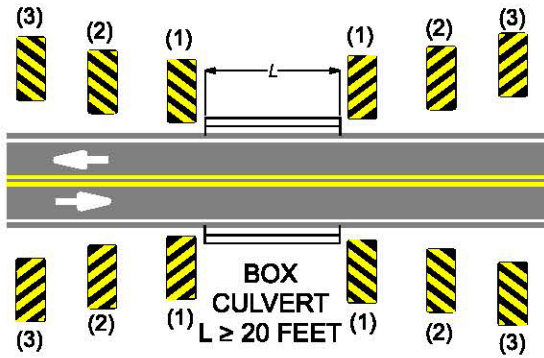
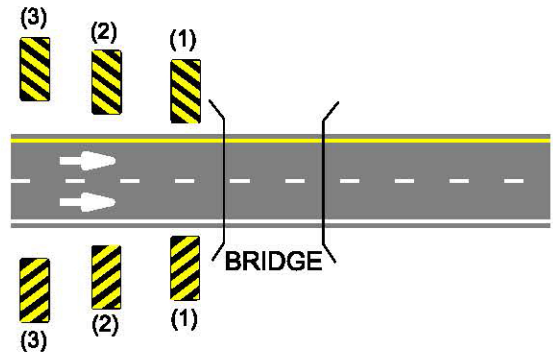


### 2-LANE - 2-WAY HIGHWAY

### DIVIDED HIGHWAY

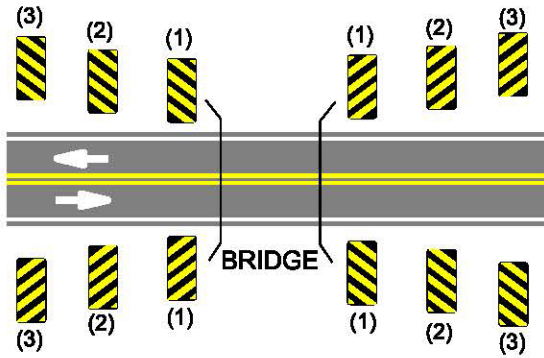

#### TYPE 3 OBJECT MARKER INSTALLATION

- (1) PLACED AS NEAR THE OBSTRUCTION AS POSSIBLE AND SET TO LINE UP WITH INSIDE EDGE OF OBSTRUCTION.
- (2) PLACED 1.5 FEET OFF THE EDGE OF PAVEMENT AND 20 FEET FROM THE END OF THE OBSTRUCTION.
- (3) PLACED 3.0 FEET OFF THE EDGE OF PAVEMENT AND 40 FEET FROM THE END OF THE OBSTRUCTION.

SEE FIGURE A FOR STANDARD MOUNTING HEIGHT DETAILS FOR TYPE 3 OBJECT MARKERS.

IN AREAS WHERE THERE IS HIGH AGRICULTURAL EQUIPMENT IMPACTS WITH OBJECT MARKERS THE MOUNTING HEIGHT MAY BE ADJUSTED

- OBJECT MARKER (1) MOUNTED AT GROUND LEVEL.
- OBJECT MARKER (2) MOUNTED AT 1/2 STANDARD HEIGHT.
- OBJECT MARKER (3) MOUNTED AT STANDARD HEIGHT.

### STANDARD APPLICATION OF TYPE 3 OBJECT MARKERS OBJECTS 2' OR LESS FROM EDGE OF TRAVEL LANE/SHOULDER

Fig. 903.17.2